




Video Wall Display 55" | Infinite VW5502

Best Performance to Visualize Infinite Images

Ultrathin 0.40 mm even bezel width | Industrial Grade | Superior Quality and Durable

ImagePath™ Infinite delivers best performance on 55" video wall technology while remaining simple to operate and easy to maintain. Suitable for use in Control Room, Meeting Room, Function Room and Digital Signage. Industrial grade, superior quality and durable, supporting businesses with 24x7 operations. With a true ultrathin 0.40 mm even bezel width, it creates an infinite images on the video walls

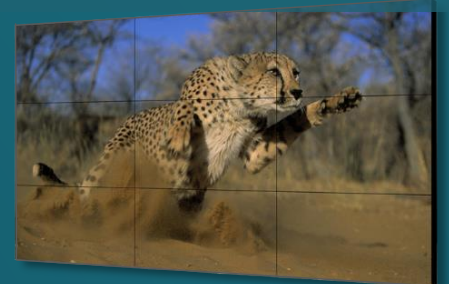


High Compatibility with ImagePath™ RealView Series
and support all other leading video wall processors

ImagePath™ Infinite video wall display comes with a big picture processing that allows input content up to 4K resolution to be spread over multiple displays up to 10x10 for multi input content configurations, VW5502 is highly compatible with ImagePath™ RealView all series and support all other leading video wall processors

OPVB - Original High Precision Video Wall Bracket
which makes ImagePath™ Infinite video wall installations Faster, Easier, and more Precise

Unlike other brands, Infinite video walls are equipped with Original High Precision Video Wall Bracket - OPVB mounting system, designed and manufactured by ImagePath™ factory. OPVB allows each video wall display to be precisely adjusted up/down, forward/backward, tilted, from front and rear access. No need for expensive third party video wall brackets to install Infinite on the wall, only need a horizontal pole to hang the OPVB, very fast and easy



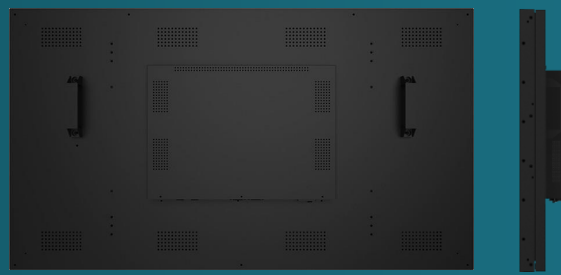

PANEL		
Screen Diagonal	55"	
Backlight	LED	
Resolution	1.920 x 1.080 (pixels)	
Even Bezel width	0.40 mm (btb 0.80 mm)	
Brightness	500 cd/m ² (typ.)	
Contrast Ratio	1300 : 1 (typ.)	
Response time	8 ms (typ.)	
Pixel pitch	0.63 (H) mm x 0.63 (V) mm	
Frequency	60 Hz	
View angle	178° (H) / 178° (V)	
Life time	60.000* hours	
Color saturation (x% NTSC)	72%	
Color support	1.07B colors	
Usage (hour/day)	24/7	
Noise level	No noise (fanless operation)	
Big picture	Up to 10x10	
I/O INTERFACE		
Type-E	Inputs	HDMI x2, DP x2, USB x1, LAN x1 RS232(RJ45) x1, IR x1
	Outputs	DP x1, RS232(RJ45) x1
Type-C	Inputs	HDMI x1, DVI-D x1, USB x1 VGA x1, RS232(RJ45) x1, IR x1
	Output	RS232(RJ45) x1

MOUNTING SYSTEM	
Type	ImagePath™ OPVB (4 pcs per display)
Orientation	Landscape or Portrait
In Wall Service	Front and Rear access
Adjustment	High Precision 6 axis integrated
Material	Solid Steel (3mm), CNC cutting and bending
Treatment	Anti-Rust Coating

POWER	
Voltage	100 ~ 240 VAC, 50-60 Hz
Power consumption	180W (typ.)

ENVIRONMENT	
Operating temperature	0°C ~ 40°C
Storage temperature	-10°C ~ 60°C
Storage humidity	10% ~ 90% RH Non-Condensing
Operating humidity	20% ~ 85% RH Non-Condensing

WEIGHT & PACKING	
Net Weight - Packing	19.8 kg - 32.1 kg
Packing size (W x D x H)	1290 x 300 x 800 mm

ACCESSORIES	
Power Cord	1
User's Manual	1
Warranty Card	1

DIMENSIONS (mm)

